


lino lavatory faucet L30, chrome, IR-sensor, Click, mains operation exposed, without drain assembly, pressureless, G3/8

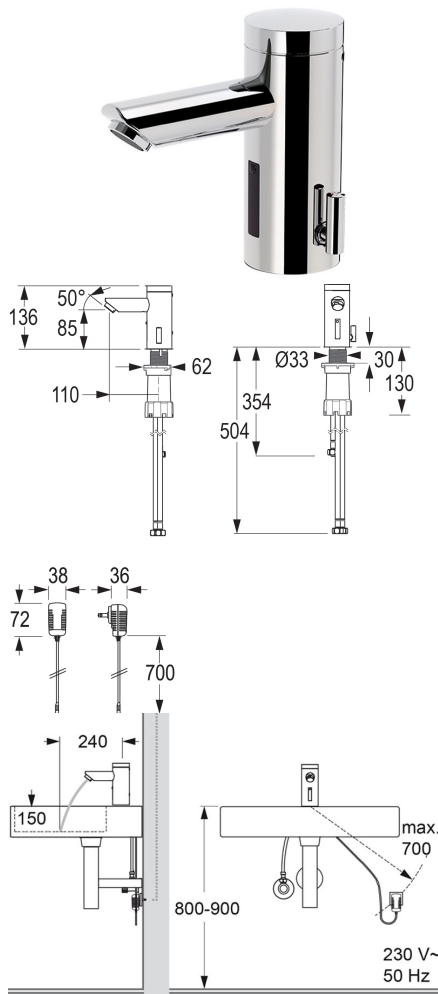

lino lavatory faucet L30, with IR sensor, with temperature-mixing, low pressure (for open water heater), chromed

Touchless, electronically controlled lavatory faucet:

- Cold water supply connection and decentralized water treatment (boiler)
- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Infrared sensor (with automatic setting feature!), microprocessor
- Follow-up time and sensor sensitivity adjustable with function key
- Cold water supply connection for decentralized water treatment (boiler)
- With flexible high-pressure hoses, flow limiters and built-in filters
- Continuous water flow time and hygienic flush time adjustable with function key
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- 12, 24 or 48-hour hygienic flush activatable with function key
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions
- Compatible with Service APP: Control of stored operational data, settings and control functions

Notice:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

Attributes:

Nominal connection width: G3/8,

Use: IR-sensor, contact-free activation

Mixture: Pressureless,

Function key: Click, counter-sunk Click - without optional features

Power supply: Mains operation exposed, mains power supply 230/6V

Drain assembly: Without drain assembly,

Colour: Chrome,

Sorting: 637,

Technical Data:

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
Operating pressure: 0,3 – 10 bar
Water temperature (max.): 80 °C
Flow rate: Approx. 6 l/min / 1,3 gpm (3 bar)
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set
(adjustable with function key 0,5-20 min)
Sensor sensitivity: Automatic self-adapting sensor technology
Built-in filters: 0,5 mm mesh size
Aerator: Economic aerator, CASCADE (self-cleaning)
Flexible hoses: 350 mm
Angle valve connection: G 3/8
Click: Recessed function key - without additional functions
Engineering standards: DIN EN 200; Noise class I; P-IX 9575 / IA; CE