
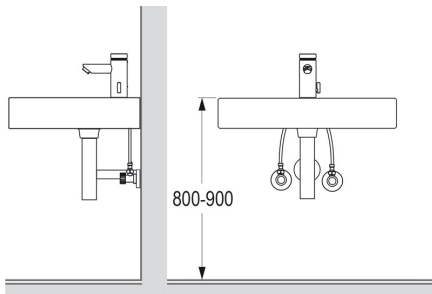


tipolino self-closing faucet L15P, chrome, piezo push button, battery, temp. mixing, G3/8



tipolino self-closing lavatory faucet L15P, with electronic start/stop button, with temperature-mixing, chromed

Electronically controlled self-closing lavatory faucet with start/stop button:

- For connection to hot and cold water
- Modular single-piece design without separate installation box, sturdy brass housing, chromed
- Microprocessor electronics
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Hot and cold water supply connection with flexible high-pressure hoses
- Follow-up time with start/stop button adjustable
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Scald protection adjustable
- Economic aerator
- 12, 24, 48-hour hygienic flush activatable with start/stop button
- Compatible with CNX and Service APP: Control of stored operational data, settings and control functions
- Compatible with Service APP: Control of stored operational data, settings and control functions

Notice:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

## Attributes:

Nominal connection width: G3/8,

Use: Piezo push button, with electronic start/stop-button

Mixture: Temp. mixing, with mixing lever for temperature regulation

Power supply: Battery,

Colour: Chrome,

Sorting: 723,

## Technical Data:

Battery: 6 V Lithium CRP2 - standard; life time up to 4 years

Operating pressure: 0,3 – 10 bar  
Water temperature (max.): 80 °C  
Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)  
Water flow time: 7 s pre-set (manuell adjustable with button 2 s - 3 min)  
Hygienic flush time: 30 s  
Built-in filters: 0,5 mm mesh size  
Aerator: Economic aerator, CASCADE (self-cleaning)  
Flexible hoses: 350 mm  
Angle valve connection: G 3/8  
Engineering standards: DIN EN 200; CE