


iQ lavatory faucet A10, chrome, IR-sensor, Click, mains operation exposed, without drain assembly, temp. mixing, G3/8

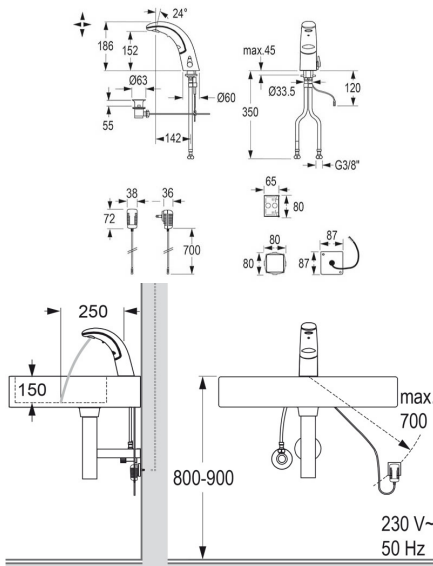

iQ lavatory faucet A10, with IR sensor, with temperature-mixing, chromed

Touchless, electronically controlled lavatory faucet:

- For connection to hot and cold water
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Dual infrared sensors (with automatic setting feature), microprocessor
- Hot and cold water supply connection with flexible high-pressure hoses
- Follow-up time and sensor sensitivity adjustable with function key
- Check valves and built-in filters
- Temperature adjustable or fixable (vandal-resistant construction)
- Adjustable hot water limitation (mechanically)
- 12, 24 or 48-hour hygienic flush activatable with function key
- Compatible with CNX, Service APP and Service Monitor: control of stored operational data, settings and control functions
- Compatible with Service APP: Control of stored operational data, settings and control functions

Notice:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

Only possible with mains and VARIOconnect versions.

**Attributes:**

Nominal connection width: G3/8.

Use: IR-sensor, contact-free activation

Mixture: Temp. mixing, with mixing lever for temperature regulation

Function key: Click, counter-sunk Click - without optional features

Power supply: Mains operation exposed, mains power supply 230/6V

Drain assembly: Without drain assembly,

Colour: Chrome,

Sorting: 671,

**Technical Data:**

Mains supply: Plug-in transformer 110-240 V 50-60 Hz / 6 V  
Operating pressure: 0,3 – 10 bar  
Water temperature (max.): 80 °C  
Flow rate (approx.): 6 l/min / 1,6 gpm (3 bar)  
Follow-up time: 1 s pre-set (adjustable with function key 0-10 s)  
Continuous water flow and hygienic flush time: 2 min pre-set  
(adjustable with function key 0,5-20 min)  
Sensor sensitivity: Automatic self-adapting sensor technology  
Built-in filters: 0,5 mm mesh size  
Aerator: Economic aerator, CASCADE (self-cleaning)  
Flexible hoses: 350 mm  
Angle valve connection: G 3/8  
Click: Recessed function key - without additional functions  
Engineering standards: DIN EN 200; Noise class I; P-IX 9576 / IA; CE