


lino exposed wall-mounted faucet W45, chrome, with touch-free start/stop function, battery, with thermostat, G3/8

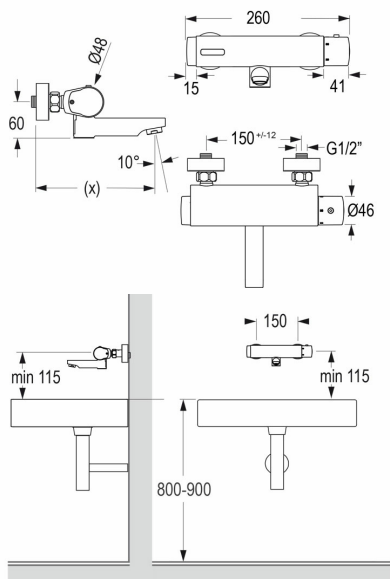

lino exposed wall-mounted faucet W45, with touchless Start/Stop function, with thermostat, chromed

Electronically controlled wall-mounted faucet for surface installation with touchless start/stop function (close detection):

- Sturdy version, faucet body made of brass, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge) and economic aerator
- Stiff spout
- Dual infrared sensors (close detection), microprocessor
- Temporary-off (cleaning) and continuous water flow time (filling of basin) adjustable with Touch
- Continuous-on and hygienic flush time activated by Touch
- Temperature adjustable with thermostat-cartridge
- With anti-scalding and auto-thermic protection
- 12, 24 or 48-hour hygienic flush adjustable with Touch
- Compatible with Service APP: Control of stored operational data, settings and control functions

#### Notice:

Service APP only available in conjunction with BLE Converter - no permanent evaluation option.

When using the Service APP, the BLE Converter must be ordered separately.

#### Attributes:

Nominal connection width: G3/8,  
Use: With touch-free start/stop function,  
Mixture: With thermostat,  
Power supply: Battery,  
Spout (x): 260 mm,  
Colour: Chrome,  
Sorting: 835,

#### Technical Data:

Battery: 6 V Lithium CRP2 - commercial; life time up to 4 years  
Operating pressure: 0,3 – 10 bar  
Water temperature (max.): 80 °C  
Flow rate: 5 l/min / 1,3 gpm (3bar)

Water flow time: 7 s pre-set (adjustable with Touch 1-30 s)  
Continuous water flow and hygienic rinse time: 2 min pre-set  
(adjustable with Click 0,5-20 min)  
Temporary-off: 2 min. (fixed)  
Built-in filters: 0,5 mm mesh size  
Aerator: Economic aerator, CASCADE (self-cleaning)  
Spout: 260 mm  
Engineering standards: DIN EN 200; CE